

Product User Manual

Meteosat Solar Surface Radiation and Effective Cloud Albedo Climate Data Record


SARAH-2.1 climate data records

[DOI: 10.5676/EUM_SAF_CM/SARAH/V002_01](https://doi.org/10.5676/EUM_SAF_CM/SARAH/V002_01)

Effective Cloud Albedo (CAL)	CM-23082 / CM-23085
Surface Incoming Shortwave Radiation (SIS):	CM-23202 / CM-23205
Surface Direct Irradiance (SDI):	CM-23291 / CM-23295
Spectral Resolved Irradiance (SRI):	CM-23241 / CM-23245
Sunshine Duration (SDU):	CM-23282 / CM-23283

Reference Number:
Issue/Revision Index:
Date:

SAF/CM/DWD/PUM/METEOSAT/HEL
2.4
22.01.2019

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARA-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	--	---

Document Signature Table

	Name	Function	Signature	Date
Author	Uwe Pfeifroth Jörg Trentmann Steffen Kothe	CM SAF Scientists		31/10/2018
Review	R. Hollmann	CM SAF Science Coordinator		31/10/2018 17/01/2019
Approval	CM SAF Steering Group			04/12/2018
Release	Martin Werscheck	Project Manager		22/01/2019

Distribution List

Internal Distribution	
Name	No. Copies
DWD Archive	1

External Distribution		
Company	Name	No. Copies
Public		1


Document Change Record

Issue/Revision	Date	DCN No.	Changed Pages/Paragraphs
1.0	08.08.2014	SAF/CM/DWD/PUM/METEOSAT/HEL	First Version
1.1	01.11.2014	SAF/CM/DWD/PUM/METEOSAT/HEL	Modified version according to review comments
2.0	20.08.2016	SAF/CM/DWD/PUM/METEOSAT/HEL	Updated for the release of SARA-2
2.1	29.11.2016	SAF/CM/DWD/PUM/METEOSAT/HEL	Modified version according to review comments
2.2	16.08.2018	SAF/CM/DWD/PUM/METEOSAT/HEL	Changes due to extension of SARA-2 until 2017
2.3	31.10.2018	SAF/CM/DWD/PUM/METEOSAT/HEL	Changes due to DRR 3.10: update of Table 2-1.
2.4	22.01.2019	SAF/CM/DWD/PUM/METEOSAT/HEL	Final Editing and Layout modification to CDOP 3 Layout

Table of Contents

1	The EUMETSAT SAF on Climate Monitoring (CM SAF).....	8
2	Introduction	10
3	Description of Meteosat climate data records	13
3.1	Basic processing of Meteosat images.....	15
3.2	Effective Cloud Albedo (CAL)	16
3.2.1	Product Definition.....	16
3.2.2	Basic Retrieval approach	16
3.2.3	Details on processing, gridding and averaging	16
3.2.4	Input data	17
3.2.5	Product example	18
3.2.6	Validation	18
3.2.7	Limitations.....	19
3.3	Surface Incoming Solar Radiation (SIS).....	19
3.3.1	Product definition	19
3.3.2	Basic Retrieval approach	19
3.3.3	Details on processing, gridding and averaging	20
3.3.4	Input data	20
3.3.5	Product example	21
3.3.6	Validation	21
3.3.7	Limitations.....	23
3.4	Surface Direct irradiance (SDI)	23
3.4.1	Product definition	23
3.4.2	Algorithm outline	24
3.4.3	Details on processing, gridding and averaging	24
3.4.4	Input data	24
3.4.5	Product example	25
3.4.6	Validation	25

3.4.7	Limitations	26
3.5	Spectral Resolved Irradiance (SRI).....	27
3.5.1	Product Definition.....	27
3.5.2	Basic Retrieval Approach	27
3.5.3	Details on processing, gridding and averaging	28
3.5.4	Input data	28
3.5.5	Product example	28
3.5.6	Validation	28
3.5.7	Limitations.....	29
3.6	Sunshine Duration (SDU)	29
3.6.1	Product definition	29
3.6.2	Algorithm outline	29
3.6.3	Details on processing, gridding and averaging	30
3.6.4	Input data	30
3.6.5	Product example	30
3.6.6	Validation	30
3.6.7	Limitations.....	31
3.7	Planned improvements	31
4	Data description	32
4.1	Product Names.....	32
4.2	Data Format and Ordering	32
4.3	Data ordering via the Web User Interface (WUI)	33
4.3.1	Product ordering process	34
4.4	Data volume:	34
4.5	Contact User Help Desk staff.....	34
4.6	Feedback/User Problem Report.....	34
4.7	Service Messages / log of changes.....	34
5	Tools and Auxiliary data	35

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

5.1	Climate data operators (CDO)	35
5.2	CM SAF R Toolbox.....	35
5.3	Auxiliary Data	36
6	References.....	37
7	Appendix	39
7.1	Appendix A: Description of the netCDF file format	39
7.2	Appendix B: SARB/CERES albedo	40
7.3	Appendix C: Complete equations for the effective cloud albedo - solar irradiance relation	40
8	Glossary – List of Acronyms in alphabetical order	42

List of Figures:

Figure 3-1: Area coverage for CM SAF SARAH-2.1 climate data records; shown is the SIS climatological mean.	15
Figure 3-2: Example of the CAL monthly means for June 2003.	18
Figure 3-3: Illustration of the SARAH-2.1 SIS product. Long-term mean 1983-2017.	21
Figure 3-4: Comparison of SARAH-2.1 SIS CDR with GEBA ground measurements. Compared to GEBA there is no significant trend apparent, which indicates the temporal stability of the SIS CDR... ..	23
Figure 3-5: Illustration of the SDI (DNI and SID) climate data record; long term mean for 1983-2017.	25
Figure 3-6: Normalized spectral information for July 2014 for a tropical (10°E, 10°N) and a desert (10°E, 25°N) location.	28
Figure 3-7: Illustration of the SDU climate data records; mean annual sum for 1983-2015.	30

List of Tables:

Table 2-1: History of Meteosat-based CM SAF Climate Data Records of Surface Radiation parameters	12
Table 3-1: Overview of SARAH-2.1 data records discussed in this PUM.	13
Table 3-2: Overview of CM SAF surface irradiance and effective cloud albedo products and data records. Entries in blue are discussed in this document.	13
Table 3-3: Accuracy achieved for CAL. The 90 % limit compiles all regions, no region is excluded.	18
Table 3-4: Accuracy achieved for SIS. The 90 % limit includes all regions, no region is excluded.	21
Table 3-5: Summary of validation results for SIS: N Number of comparisons. MAB: mean of absolute bias values for monthly / daily means. SD: standard deviation. AC: Correlation of anomalies. $Frac_{mon}$: Fraction of cases (months/days) with a MAB greater than the target accuracy (target level used for the assessment shown in brackets). Basis of the results has been the comparison with 15 BSRN stations. For comparison the values of validation of the first version of the SARAH data record is also shown.	22
Table 3-6: Accuracy achieved for SDI (SID and DNI).	25
Table 3-7: Summary of validation results for SARAH-2.1 SDI: N Number of comparisons. MAB: mean of absolute bias values for monthly/daily means. SD: standard deviation. AC: Correlation of anomalies. $Frac_{mon}$: Fraction of cases (months) with an accuracy outside of 30 W/m ² (monthly means) and 40 W/m ² (daily means). Basis of the results has been the comparison with 15 BSRN stations.	26
Table 3-8: Spectral information provided in the SARAH-2.1 SRI data record. The data are provided in W/m ² for each spectral band.	27
Table 3-9: Accuracy achieved for SDU.	30
Table 3-10: Summary of validation results for SDU: N Number of comparisons. MAD: mean of absolute bias values for monthly/daily sums. SD: standard deviation. AC: Correlation of anomalies. $Frac_{mon}$: Fraction of cases (months) with an accuracy outside of 30h (monthly sums) and 1.5h (daily sums). Basis of the results has been the comparison with CLIMAT and ECA&D stations.	31


	Product user Manual Meteosat Climate Data Records of Surface Radiation SARA-H2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

Table 5-1: Table of available auxiliary data records. AOD=Aerosol Optical Depth, ssa=single scattering albedo, gg=asymmetry parameter, the aerosol data is available as ASCII files from the CM SAF web page in the menu >add on products<. 36


Table A-1: *Dimensions in the SIS, SID, DNI, CAL netCDF files* 39

Table A-2: Variables in the netCDF SIS, SID, DNI, CAL, SDU files 39

Table A-3 Dimensions in the SRI netcdf files 39

Table A-4: Variables in the netcdf SRI files..... 39

Table A-5: Variable attributes in the netCDF files 40

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARA-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	--	---

Applicable Documents

Reference	Title	Code
AD 1	CM SAF Product Requirement Document	SAF/CM/DWD/PRD/3.2

Reference Documents

Reference	Title	Code
RD 1	Validation Report Meteosat Climate Data Records of Surface Radiation SARA-2.1	SAF/CM/DWD/VAL/METEOSAT/HEL/2.2
RD 2	Algorithm Theoretical Baseline Document (ATBD) Meteosat Solar Surface Irradiance and effective Cloud Albedo Climate Data records SARA-2.1	SAF/CM/DWD/ATBD/METEOSAT/HEL/2.3

1 The EUMETSAT SAF on Climate Monitoring (CM SAF)

The importance of climate monitoring with satellites was recognized in 2000 by EUMETSAT Member States when they amended the EUMETSAT Convention to affirm that the EUMETSAT mandate is also to “contribute to the operational monitoring of the climate and the detection of global climatic changes”. Following this, EUMETSAT established within its Satellite Application Facility (SAF) network a dedicated centre, the SAF on Climate Monitoring (CM SAF, <http://www.cmsaf.eu>).


The consortium of CM SAF currently comprises the Deutscher Wetterdienst (DWD) as host institute, and the partners from the Royal Meteorological Institute of Belgium (RMIB), the Finnish Meteorological Institute (FMI), the Royal Meteorological Institute of the Netherlands (KNMI), the Swedish Meteorological and Hydrological Institute (SMHI), the Meteorological Service of Switzerland (MeteoSwiss), the Meteorological Service of the United Kingdom (UK MetOffice) and the Centre National de la recherche scientifique (CNRS) of France. Since the beginning in 1999, the EUMETSAT Satellite Application Facility on Climate Monitoring (CM SAF) has developed and will continue to develop capabilities for a sustained generation and provision of Climate Data Records (CDRs) derived from operational meteorological satellites.

In particular the generation of long term data records is pursued. The ultimate aim is to make the resulting data records suitable for the analysis of climate variability and potentially the detection of climate trends. CM SAF works in close collaboration with the EUMETSAT Central Facility and liaises with other satellite operators to advance the availability, quality and usability of Fundamental Climate Data Records (FCDRs) as defined by the Global Climate Observing System (GCOS). As a major task the CM SAF utilizes FCDRs to produce records of Essential Climate Variables (ECVs) as defined by GCOS. Thematically, the focus of CM SAF is on ECVs associated with the global energy and water cycle.

Another essential task of CM SAF is to produce data records that can serve applications related to the new Global Framework of Climate Services initiated by the WMO World Climate Conference-3 in 2009. CM SAF is supporting climate services at national meteorological and hydrological services (NMHSs) with long term data records but also with data records produced close to real time that can be used to prepare monthly / annual updates of the state of the climate. Both types of products together allow for a consistent description of mean values, anomalies, variability and potential trends for the chosen ECVs. CM SAF ECV data records also serve the improvement of climate models both at global and regional scale.

As an essential partner in the related international frameworks the CM SAF assumes the role as main implementer of EUMETSAT’s commitments in support to global climate monitoring. This is achieved through:

- Application of highest standards and guidelines as lined out by GCOS for the satellite data processing,
- Processing of satellite data within an international collaboration benefiting from developments at international level and pollinating the partnership with own ideas and standards,
- Intensive validation and improvement of the CM SAF climate data records,
- Taking a major role in data record assessments performed by research organisations such as WCRP (World Climate Research Programme),
- Maintaining and providing an operational and sustained infrastructure that can serve the community within the transition of mature CDR products from the research community into operational environments.

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

A catalogue of all available CM SAF products is accessible via the CM SAF webpage, www.cmsaf.eu. Here, detailed information about product ordering, add-on tools, sample programs and documentation is provided.

2 Introduction

This CM SAF Product User Manual (PUM) provides relevant information to the user on the Surface Solar Radiation Data Record – Heliosat Edition 2.1 (SARAH-2.1).

The generated 35 year long (1983-2017) continuous surface radiation climate data records are based on observations from the Meteosat First and Second Generation satellites; it is the second release of the SARAH data record (SARAH-2) together with the extension for the years 2016 and 2017. The Digital Object Identifier (DOI) of this SARAH-2.1 data record (1983-2017) is 10.5676/EUM_SAF_CM/SARAH/V002_01 and includes the SARAH-2 data record (1983-2015) (DOI: 10.5676/EUM_SAF_CM/SARAH/V002).

A peer-reviewed publication describing the SARAH climate data record, its generation and applications is given by Mueller et al., 2015b.


The document enables the user to perform an appropriate use of the data. This manual describes available products including example images, gives basic algorithm descriptions and a brief overview of the accuracy. It also discusses potential difficulties affecting the scientific interpretation. Additionally, a technical description of the data including information on format as well as on access and handling tools (e.g. mapping and display tools) is provided in the final sections.

CM SAF data products are distinguished between operational monitoring products and data records (Schulz et al., 2009). Operational monitoring products are disseminated with appropriate timeliness for climate monitoring (8 weeks up to 5 days after observation at the latest) to support operational climate monitoring applications of National Meteorological and Hydrological Services and other services. The timeliness requirement means that this type of product is not a priori suitable for monitoring of inter-annual variability and trends with high confidence. Bias errors due to e. g. sensor degradations and orbital shifts as well as inter-satellite biases are not corrected for in the operational monitoring product. However, the characterisation of relatively strong anomalies on the monthly scale should be feasible. Concerning the retrospective produced data records, errors due to sensor degradations, orbital changes and inter-satellite biases are minimised. Those data records are aimed at providing time series suitable for analysing variability at longer scales than inter-annual. This Product User Manual describes exclusively the CM SAF Meteosat surface solar radiation climate data record SARAH V2.1, hence a data records covering a fixed period.

Long time series are needed for climate monitoring and analysis. For this reason, there is a need to employ the satellite information of the first generation of Meteosat satellites (Meteosat-2 to Meteosat-7) to generate climate information. The MVIRI (Meteosat Visible-InfraRed Imager) instrument on-board the Meteosat First Generation satellites is a passive imaging radiometer with three spectral channels a visible channel covering 0.5-0.9 microns, and infra-red channel covering 5.7-7.1 microns and 10.5-12.5 microns. MVIRI comes with a spatial resolution of 2.5km for the visible and 5km for the IR channels, sub-satellite point respectively.

The second generation of Meteosat satellites is equipped with the Spinning Enhanced Visible and InfraRed Imager (SEVIRI) and the Geostationary Earth Radiation Budget (GERB) instrument. The GERB instrument is a visible-infrared radiometer for earth radiation budget studies. It provides accurate measurements of the shortwave (SW) and longwave (LW) components of the radiation budget at the top of the atmosphere. SEVIRI employs twelve spectral channels, which provide more information of the atmosphere compared to its forerunner. Several retrieval algorithms have been developed in order to use the additional information gained by the improved spectral information of MSG mainly for now-casting applications (e. g. Nowcasting SAF algorithm, Mueller et al., 2009). However, these algorithms can not be applied to the MVIRI instrument on-board the Meteosat First Generation satellites as they use spectral information that is not provided by MVIRI.

Hence, in order to be able to provide a long time series covering more than 30 years there is a need for a specific climate algorithm that can be applied to the Meteosat First and Second

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

Generation satellite instruments. Moreover, the retrieved climate variable must have climate quality. This is the reason why the same algorithm used for MVIRI is also applied to SEVIRI. The algorithm consists of two parts, the modified Heliosat method, described in section 3.2.2, is used for the retrieval of the effective cloud albedo CAL (section 3.2). In a second step the MAGIC approach, described in section 3.3.2, is used for the calculation of the all sky surface radiation based on CAL (section 3.3 and 3.4). The combination of these methods is referred as MAGIC SOL. The surface solar radiation climate data records generated with MAGIC SOL are referred as SARAH: Surface Solar Radiation Data records – Heliosat.

The MAGIC SOL method does meet the above mentioned requirements for the generation of climate data records and is in detail described in RD 2. The method provides the effective cloud albedo, the solar surface irradiance, and direct surface solar radiation parameters, sunshine duration, and the spectrally-resolved surface solar irradiance.

Version history since CDOP

The following table lists product versions according to the release history of the Meteosat climate data records from the first release in January 2011 to the respective new release. The version history is also available for each product at www.cmsaf.eu.

The table follows the official versioning of the CM SAF work plan and of the Web User Interface. However, for the version 2 of the CM SAF radiation climate data records a specific name is assigned, SARAH-2. Thus, the name allows a clear distinction of the data records. With this document, the latest data record SARAH-2.1 – an extension of SARAH-2 until 2017 is released.

Table 2-1: History of Meteosat-based CM SAF Climate Data Records of Surface Radiation parameters

Version	Name	Document code	Time range	Major changes
1		MVIRI_HEL	Jan 1983 – Dec 2005	<ul style="list-style-type: none"> •First version based on modified Heliosat version 1.0 •MAGIC version 0x86
2	SARAH-1	METEOSAT_HEL	Jan 1983 – Dec 2013	<ul style="list-style-type: none"> •Second version of data record covering MFG and MSG time period, hence longer time period covered. •Improved algorithms & accuracy. •Improved aerosol information. •Name of the data record: SARAH
3	SARAH-2	METEOSAT_HEL	Jan 1983 – Dec 2015	<ul style="list-style-type: none"> •Second release of the SARAH CDR •Includes SRI •Includes SDU •Improved treatment of water vapour •Geometry correction for high viewing angles •Improved temporal stability
	SARAH-2.1	METEOSAT_HEL	Jan 1983 – Dec 2017	<ul style="list-style-type: none"> •Extension of SARAH-2 in time (until 2017) -> SARAH-2.1 consists of SARAH-2 plus 2016, 2017.

3 Description of Meteosat climate data records

The Meteosat processing provides climate data records of the effective cloud albedo, the solar surface irradiance, the surface direct irradiance, the sunshine duration and the spectrally-resolved surface irradiance. The applied method, i. e., MAGIC SOL described in detail in the Algorithm Theoretical Baseline document RD 2 (SAF/CM/DWD/ATBD/METEOSAT/HEL/2.1), provides also information on the clear sky reflection. The effective cloud albedo, the solar surface irradiance, the surface direct irradiance, the spectrally-resolved surface irradiance and the sunshine duration are available on a regular 0.05x0.05 degree grid. The spatial coverage covers the Meteosat disk up to a scanning angle of 68 degree as illustrated in Figure 3-1. The data records CAL, SIS, and SDI are available as 30-min instantaneous, daily and monthly means; SRI is available as monthly means. The sunshine duration is provided as daily and monthly sums. All SARAH-2 climate data records are introduced in Table 3-1 with associated acronyms and units. Table 3-2 provides an overview of all available surface irradiance and effective cloud albedo data records and products.

In cooperation with the PV GIS team from the EU Joint Research Centre (EU JRC) the Meteosat IODC observations from 1999 to 2015 have been used to generate a surface solar radiation data record (SARAH-E), this climate data record is available at http://dx.doi.org/10.5676/DWD/JECD/SARAH_E/V001

Table 3-1: Overview of SARAH-2.1 data records discussed in this PUM.

Acronym	Product title	Unit
SIS	Surface Incoming Shortwave Irradiance	W / m ²
CAL	Effective Cloud Albedo	Dimensionless
SDI	Surface Direct Irradiance	W / m ²
SRI	Spectral resolved Irradiance	W / m ²
SDU	Sunshine Duration	h

Table 3-2: Overview of CM SAF surface irradiance and effective cloud albedo products and data records. Entries in blue are discussed in this document.

Acronym / Identifier	Product title	Type	Satellite & Instrument	Period & Coverage
SIS CM-54	Surface Incoming Shortwave Radiation	Data record	MFG MVIRI	1983-2005 Meteosat disk
SIS CM-49	Ditto	Product	MSG SEVIRI/GERB	2007-today Meteosat disk
SIS CM-48	Ditto	Product	MSG SEVIRI/GERB	2005-2007 Europe
SIS CM-50	Ditto	Product	NOAA AVHRR	2005-today Europe
SIS CM-51	Ditto	Product	MSG/NOAA merged	2007-today Meteosat disk & Northern Europe
SIS CM-23201	Ditto	Data record	MFG/MSG	1983-2013 Meteosat disk
SIS CM-23202	Ditto	Data record	MFG / MSG	1983 – 2015 Meteosat disk
SIS CM-23205	Ditto	Data record	MFG / MSG	1983 – 2017 Meteosat disk
CAL	Effective Cloud	Data	MFG	1983-2005

Acronym / Identifier	Product title	Type	Satellite & Instrument	Period & Coverage
CM-111	Albedo	record	MVIRI	Meteosat disk
CAL CM-23081	Ditto	Data record	MFG/MSG	1983-2013 Meteosat disk
CAL CM-23082	Ditto	Data record	MFG/MSG	1983-2015 Meteosat disk
CAL CM-23085	Ditto	Data record	MFG/MSG	1983-2017 Meteosat disk
SID CM-106	Direct Irradiance at Surface	Data record	MFG MVIRI	1983-2005 Meteosat disk
SID CM-105	Ditto	Product	MSG SEVRI/GERB	2009-today Meteosat disk
DNI CM-23231	Direct Normal Irradiance at surface	Data record	MFG/MSG	1983-2013 Meteosat disk
SDI (SID,DNI) CM-23291	Surface Direct Irradiance	Data record	MFG/MSG	1983-2015 Meteosat disk
SDI (SID,DNI) CM-23295	Ditto	Data record	MFG/MSG	1983-2017 Meteosat disk
SRI CM-23241	Spectrally Resolved Irradiance	Data record	MFG/MSG	1983-2015 Meteosat disk
SRI CM-23245	Ditto	Data record	MFG/MSG	1983-2017 Meteosat disk
SDU CM-23281	Sunshine Duration	Data record	MFG/MSG	1983-2015 Meteosat disk
SDU CM-23282	Ditto	Data record	MFG/MSG	1983-2017 Meteosat disk

Figure 3-1 gives an overview of the processed and available area.

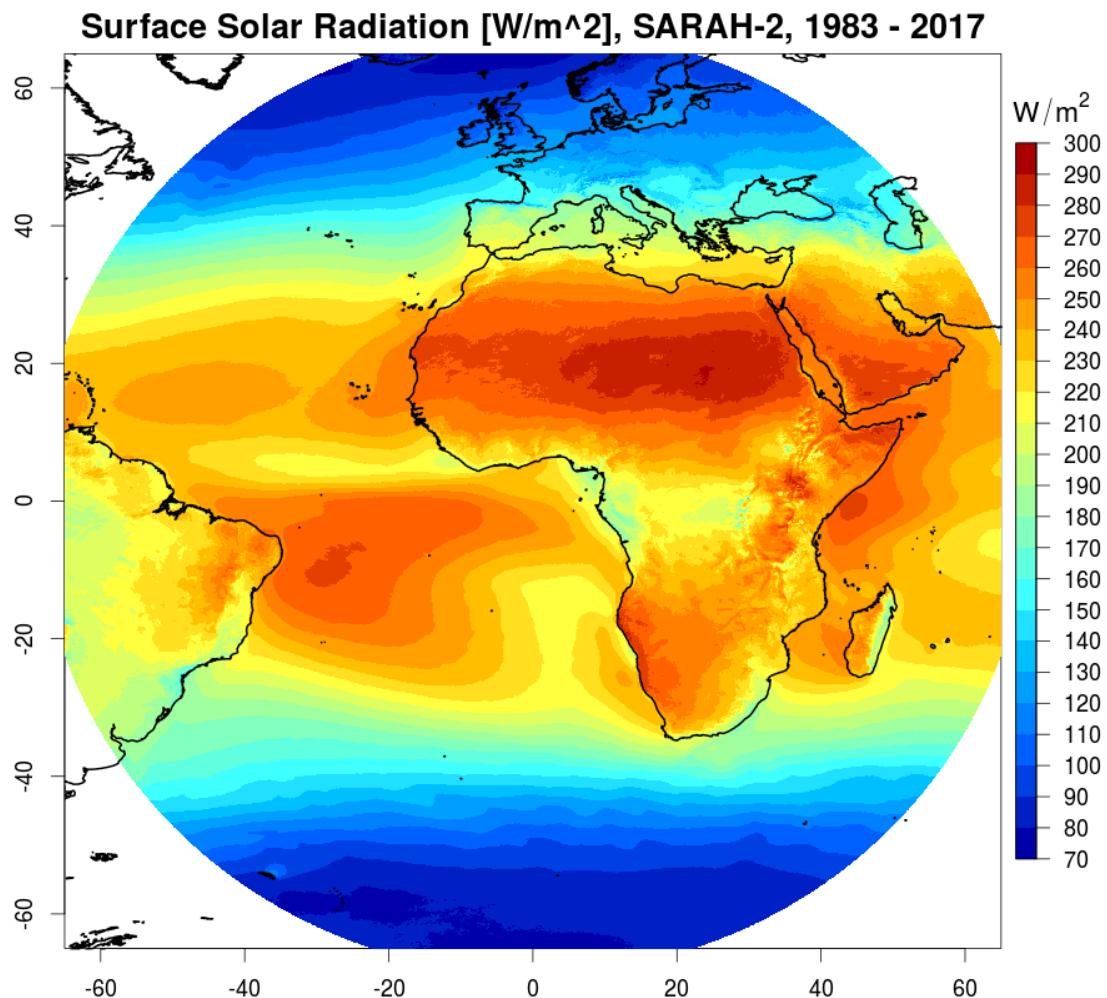


Figure 3-1: Area coverage for CM SAF SARAH-2.1 climate data records; shown is the SIS climatological mean.

3.1 Basic processing of Meteosat images

The processing of the METEOSAT data is done in satellite projection. The results are transferred to the regular latitude-longitude-grid using a subroutine of SPECMAGIC (Mueller et al., 2009). For the retrieval of the effective cloud albedo, the Heliosat algorithm is used (Hammer et al., 2003). The original version of the Heliosat method has been modified to generate a data record that meets climate quality. The effective cloud albedo derived with the modified Heliosat version is used in combination with the clear sky surface radiation model SPECMAGIC (Mueller et al., 2009; Mueller et al., 2012) to derive the surface radiation products from the MVIRI and SEVIRI instruments on board the geostationary Meteosat satellites number 2 to 10. The derived parameters and methods are described in more detail in the following sections. The complete model (cloudy and clear sky) is called MAGIC SOL and is described in more detail in the CM SAF ATBD (SAF/CM/DWD/ATBD/METEOSAT_HEL).

The Heliosat method does not require calibrated radiances as input, but is directly based on image counts. To consider the aging of the satellite instruments and the transitions between the satellites of the Meteosat series a self-calibration method has been developed and applied. The self-calibration method overcomes the need for well calibrated radiances, which are not available for Meteosat First Generation at present.

From the Heliosat algorithm the effective cloud albedo is derived. Together with information about the atmospheric clear sky state (water vapour, aerosols, ozone) the effective cloud albedo is used as input for the SPECMAGIC method to calculate the direct irradiance and the solar surface irradiance.

In the following sub-sections a brief description of each individual surface radiation product is given with associated information on averaging methods, validation procedures and known limitations.

3.2 Effective Cloud Albedo (CAL)

3.2.1 Product Definition

The effective cloud albedo is defined as the amount of reflected irradiance for all sky relative to the amount of reflected irradiance for clear sky. The effective cloud albedo is the central cloud information used to derive the solar surface irradiance. It is dimensionless. CAL will be provided for the Meteosat disk, covering Europe and Africa on a regular 0.05x0.05 degree latitude-longitude grid. The data record will compile monthly and daily means, as well as 30-min instantaneous data covering the period 1983-2017.

It is important to note that the effective cloud albedo does depend on the cloud reflectivity and the surface albedo. The same cloud has a larger effective cloud albedo over a dark surface (e.g., ocean) than over a bright surface (e.g., desert). For the assessment of the radiative impact of clouds on the reflected solar radiation the effective cloud albedo is the relevant cloud radiative property.

3.2.2 Basic Retrieval approach

The original Heliosat method is described in several publications, e. g. in Hammer et al., 2003, and Cano et al., 1986. It is used to retrieve the effective cloud albedo. The effective cloud albedo is defined as:

Equation 3-1

$$CAL = \frac{R - R_{sfc}}{R_{max} - R_{sfc}}$$

Here R_{max} is a measure for the maximum cloud reflection, R_{sfc} is the clear sky reflection, dominated by the surface albedo and R is the observed irradiance. R_{max} and R_{sfc} are determined by statistical methods from the observed radiance (R) on a monthly basis. Hence all quantities are based on the observation of the reflections. No additional information (e. g., from a model) is required for the retrieval of the effective cloud albedo. The effective cloud albedo describes the amount of reflected irradiance for all sky relative to the amount for clear sky, normalised to the maximum cloud reflection.

The method for the derivation of R_{max} and R_{sfc} has been modified relative to the original Heliosat method to meet the needs for the retrieval of a climate data record. The methods are described in detail in the Algorithm Theoretical Baseline Document (ATBD: SAF/CM/DWD/ATBD/METEOSAT_HEL).

3.2.3 Details on processing, gridding and averaging

Monthly and daily means are calculated by arithmetic averaging, using Equation 3-2.

Equation 3-2

$$CAL_{mean} = \frac{\sum_{i=1}^n CAL_i}{n}$$

Here i is a loop over the 30-min instantaneous effective cloud albedo data for the calculation of the daily means and a loop over daily means for the calculation of monthly means.

Information on the number of daylight observations used for the generation of the CAL daily means is delivered as an additional layer in the CAL daily mean NetCDF-files. This number of observations holds also as background information for the SIS and SDI daily mean data.

The conversion from the irregular satellite projection to the regular 0.05x0.05 degree grid is done with a SPECMAGIC subroutine.

3.2.4 Input data

METEOSAT 1st generation (MFG) images of the broadband channel in openMTP format; Level 1.5 rectified image data of digital counts (not radiances) are used. The respective data are called “*Rectified Image Data*” and provided by EUMETSAT (EUM TD 06). Calibrated or inter-calibrated radiances are not needed by the applied Heliosat method, the respective issues are resolved by an implemented self-calibration method, described in more detail in the ATBD [RD 2]. This approach follows the EUMETSAT recommendation given in EUM TD 05 “...it is necessary to rely to a great extent on vicarious, or external, calibration techniques in order to maintain product quality.”

Data from all operational MFG and MSG satellites (Meteosat-2 to Meteosat-10) at 0.0 degree position have been used. Further details of the METEOSAT input data are described in EUMETSAT documentations (EUM TD 06 and EUM TD 04). From 2006 onwards the data from the MSG satellites carrying the Spinning Enhanced Visible and Infrared Imager (SEVIRI) is used. SEVIRI is a radiometer that measures the Earth's disk every 15 min in 12 spectral bands spanning visible and infrared wavelengths. For consistency reasons the SEVIRI data is used only every 30 min.

For this purpose the two narrow band visible channels are used. They are located at around 0.6 µm (VIS006) and 0.8 µm (VIS008) and have a spatial resolution of around 3 km at nadir. Further details and evaluation of the approach are given in Posselt et al., 2014. The SEVIRI data is provided in High Rate Information Transmission (HRIT) format. This is a CGMS standard format, agreed upon by satellite operators, for the dissemination of digital data, originating from geostationary satellites to users, via direct broadcast. For more details on the format see <http://www.eumetsat.int/website/home/Data/Products/Formats/index.html>.

3.2.5 Product example

Figure 3-2 provides an example of the monthly mean CAL product for June 2003.

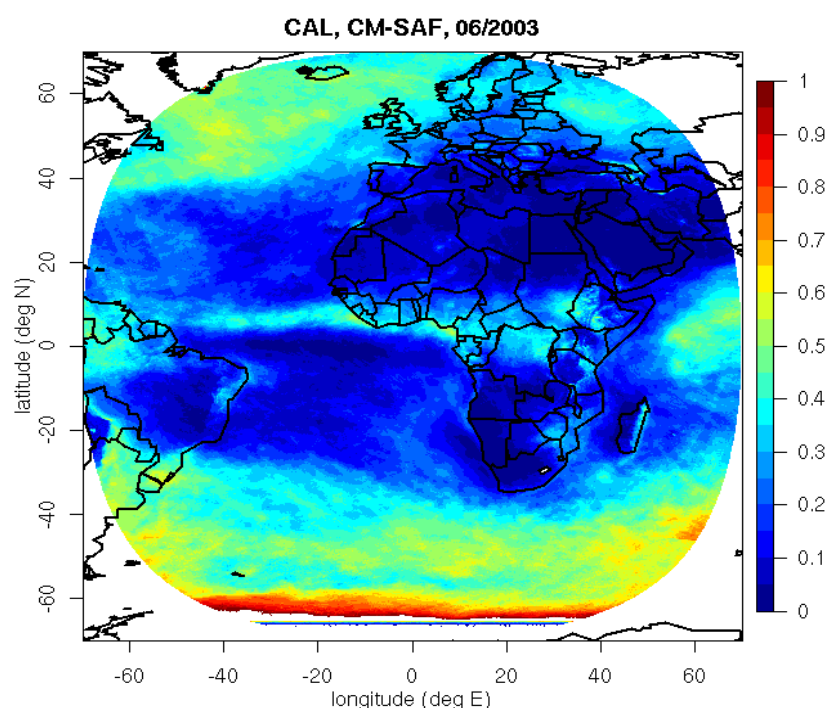


Figure 3-2: Example of the CAL monthly means for June 2003.

3.2.6 Validation

The Product Requirement Document (PRD) [AD 1] lists specific product requirements which have to be fulfilled by the products. The achieved accuracy for the CAL product is summarized in Table 3-3. CAL cannot be directly validated against ground measurements, which is a limitation of the validation.

Table 3-3: Accuracy achieved for CAL. The 90 % limit compiles all regions, no region is excluded.

Product	Summary on mean error (absolute)
CAL (METEOSAT)	<p><i>90 % of absolute bias values below 0.1 for monthly means, 0.15 for daily means respectively.</i></p> <p><i>Bias below 0.15 for hourly means.</i></p>

The detailed results of the validation are presented in the CM SAF Validation Report [RD 2: SAF/CM/DWD/VAL/METEOSAT_HEL]. The numbers given in Table 3-3 are worst case accuracies derived from the accuracy of SIS summarised in

Table 3-4.

3.2.7 Limitations

Below is a list of known deficiencies and limitations of the CAL CDR:

- R_{sfc} can only be retrieved accurately if a certain amount of clear sky cases are present within each month. In some regions and seasons, this is not always the case. In regions and periods with long-lasting clouds higher uncertainties occur. Here cloud contamination of R_{sfc} leads to lower values of CAL, hence to significant errors in CAL. This artefact occurs pre-dominantly for slant geometries (border of Heliosat coverage, or wintertime above a latitude of +/- 60 degrees). It is expected that the target accuracy of 0.1 (0.15) for monthly (daily) means is not met any more in those regions and higher uncertainties might occur. The sensitivity of this artefact on CAL accuracy is discussed in more detail in the ATBD (RD 2). However, as long-lasting clouds are a pre-requisite for the occurrence of this artefact, the effect on solar irradiance is usually rather small.
- Unidentified surface snow coverage will result in an overestimation of the effective cloud albedo; this limitation mainly effects mountainous regions, e.g., the Alpine region, but also the Eastern part of Europe.
- The neglect of the anisotropy of the cloud reflection leads to enhanced uncertainties in the effective cloud albedo, in particular for the case of high level ice clouds.

3.3 Surface Incoming Solar Radiation (SIS)

3.3.1 Product definition

The surface incoming solar (SIS) radiation is the radiation flux (irradiance) reaching a horizontal plane at the Earth surface in the 0.2 – 4 μm wavelength region. It is expressed in W/m^2 .

3.3.2 Basic Retrieval approach

The surface incoming solar radiation (SIS) is retrieved using the Heliosat method. The Heliosat method is based on the conservation of energy. As a consequence the basic relation between the solar irradiance and the effective cloud albedo is as follows:

Equation 3-3
$$SIS = SIS_{CLS} \cdot (1 - CAL)$$

Here, SIS is the solar surface irradiance, SIS_{CLS} the clear sky irradiance and CAL is the effective cloud albedo, also called cloud index, n , in former publications (e. g. Cano et al, 1986). For effective cloud albedo values higher than 0.8 the Equation 3-3 is modified in order to consider the saturation and absorption effects within optically thick clouds. The modification of the equation for small and large values of CAL is based on ground measurements and is described in detail in the ATBD [RD 2] and given in the Appendix, Section 7.3, of this document.

When CAL is known, SIS can be calculated from the clear sky solar irradiance. The algorithm to calculate the clear sky solar surface irradiance uses RTM based LUTs for the calculation of SIS_{CLS} .

The radiative transfer model (RTM) libRadtran (Mayer and Kylling, 2005) was used for the generation of the LUT. The LUT contains SIS values for a wide range of atmospheric states and 32 spectral bands. The SIS value for the actual atmospheric state is then calculated by interpolation between the states. The atmospheric states cover different values for water

vapour, ozone, aerosol optical depth, aerosol single scattering albedo, and asymmetry parameter. Several aerosol types were included (Hess et al., 1998). Additionally, Modified Lambert Beer (MLB)-LUTs are used (Mueller et al., 2004). A specific aerosol optical thickness and aerosol type can be assigned to each pixel depending on the provided aerosol background map (based on MACC data in the case of SARAH-2.1). The aerosol optical thickness and type is assigned to each pixel depending on the aerosol map derived from the aerosol information provided by the European Centre for Medium-Range Weather Forecasts (ECMWF), see Benedetti et al., 2009 and Morcrette et al., 2009 for further details. Water vapour amounts (monthly means) are taken from ERA-Interim reanalysis provided by the ECMWF. The interpolation between the LUTs is done with a linear interpolation scheme.

3.3.3 Details on processing, gridding and averaging

Daily averages are calculated following a method by Möser (1983) (also published in Diekmann et al., 1988), see Equation 3-4 for calculation of SIS mean.

Equation 3-4

$$SIS_{DA} = SIS_{CLSDA} \frac{\sum_{i=1}^n SIS_i}{\sum_{i=1}^n SIS_{CLS_i}}$$

SIS_{DA} is the daily average of SIS. SIS_{CLSDA} is the daily averaged clear sky SIS, SIS_i the calculated SIS for satellite image i and SIS_{CLS_i} the corresponding calculated clear sky SIS, n is the number of images available during a day.

The applied equation for averaging accounts for data gaps (missing values) and zero values. However, the larger the number of available images per day, the better the daily cycle of cloud coverage can be resolved, increasing the accuracy of the daily average of SIS. A minimum number of three available pixels per day is required to derive the daily mean for a specific pixel. The monthly average is calculated from the corresponding daily means at pixel level applying an arithmetic mean with a required number of 20 existing daily means.

3.3.4 Input data

- CAL from METEOSAT processing, available for each pixel in satellite resolution, CAL is described in detail section 3.2 of this document.
- Monthly mean of the total water vapour from the ERA-interim Reanalysis (Dee et al., 2011) have been used with a spatial resolution of $0.75^\circ \times 0.75^\circ$. These data have been topographically corrected to account for sub-grid topography to a spatial resolution of $0.125^\circ \times 0.125^\circ$. The pixel value is derived by spatial interpolation and assignment of the respective monthly mean.
- A monthly ozone climatology based on ERA-Interim (Dee et al., 2011) was used.
- Lookup tables.
- Surface albedo from SARB/CERES (see section 7.2 for details), only needed for the clear sky model.

Information about the aerosol optical thickness and type is derived from the aerosol information MACC (Monitoring Atmospheric Composition and Climate) provided by the European Centre for Medium-Range Weather Forecasts (ECMWF). The MACC data results from a data assimilation system for global reactive gases, aerosols and greenhouse gases. It consists of a forward model for aerosol composition and dynamics (Morcrette et al., 2009) and the data assimilation procedure described in detail in (Benedetti et al., 2009). MACC has

been evaluated to perform significantly better than Kinne et al., 2013, and the GADS/OPAC climatology (Hess et al., 1998, Köpke et al. 1997), within the MagicSol processing; see Mueller and Träger-Chatterjee (2014) and Mueller et al., 2015a for further details. The aerosol input is used as monthly long-term means on a 0.5x0.5 degree latitude-longitude grid. The pixel value is derived by spatial interpolation and assignment of the respective monthly mean

3.3.5 Product example

Figure 3-3 provides an illustration of the SIS product.

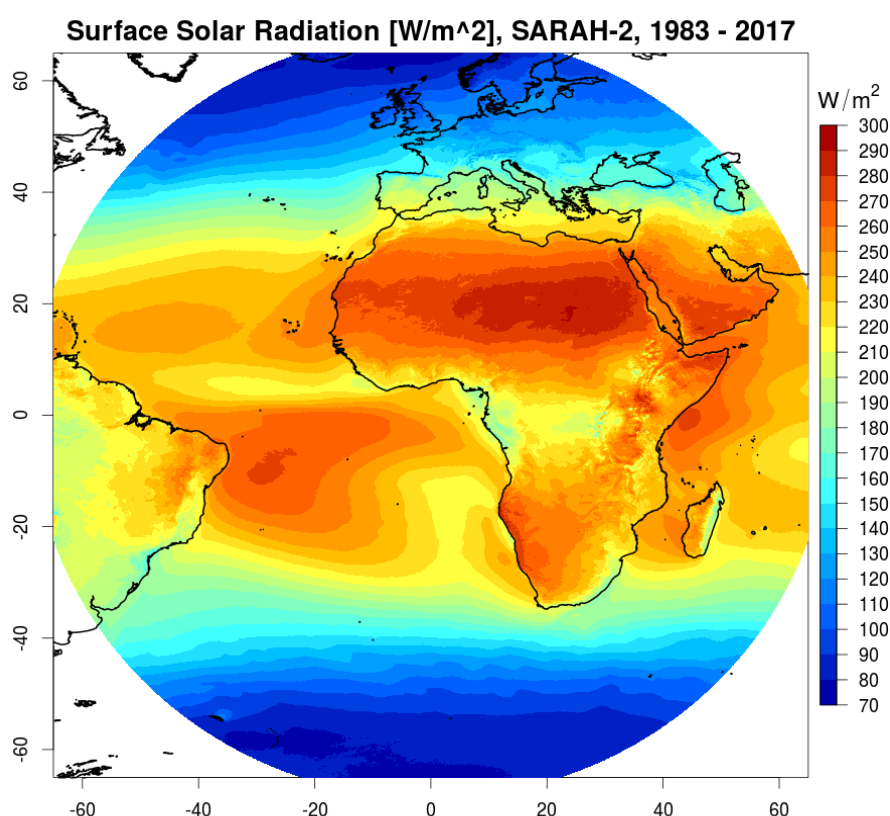


Figure 3-3: Illustration of the SARAH-2.1 SIS product. Long-term mean 1983-2017.

3.3.6 Validation

The Product Requirement Document (PRD) [AD 1] lists specific product requirements which have to be fulfilled by the products. The achieved accuracy for the SIS product is summarized in Table 3-4.

The validation has been performed against reference ground measurements of the Baseline Surface Radiation Network (BSRN). The measurements of the BSRN stations start in 1993 and the density of the network over Africa is relative thin. Hence, the BSRN validation results do not cover the complete time series of the CDR and do not cover all climate regions in Africa. This is a limitation of the CDR validation.

Table 3-4: Accuracy achieved for SIS. The 90 % limit includes all regions, no region is excluded.

Product	Summary on mean error (absolute)
SARAH-2.1 SIS	<i>Mean Absolute Bias of about 5.0 W/m² and almost 95 % of absolute bias values below 13 W/m² for monthly means; optimal accuracy (5 W/m²) almost achieved.</i>

The detailed results of the validation are presented in the CM SAF Validation Report [RD 1: SAF/CM/DWD/VAL/METEOSAT_HEL]. Here the main validation results are given in Table 3-5.

Table 3-5: Summary of validation results for SIS: N Number of comparisons. MAB: mean of absolute bias values for monthly / daily means. SD: standard deviation. AC: Correlation of anomalies. Frac_{mon} : Fraction of cases (months/days) with a MAB greater than the target accuracy (target level used for the assessment shown in brackets). Basis of the results has been the comparison with 15 BSRN stations. For comparison the values of validation of the first version of the SARAH data record is also shown.

SIS	N	Bias [W/m ²]	MAB [W/m ²]	SD [W/m ²]	AC	$\text{Frac}_{\text{mon}} > \text{target}$ accuracy [%]
SARAH-2.1						
Monthly Mean	2453	1.6	5.2	7.0	0.92	5.5 (> 13 W/m ²)
Daily mean	72.087	1.5	11.7	17.2	0.95	16.8 (> 20 W/m ²)
SARAH-1						
Monthly mean	1672	1.3	5.5	7.3	0.92	5.6 (> 15 W/m ²)
Daily mean	48.605	1.1	12.1	17.9	0.95	11.3 (> 25 W/m ²)

Using measurements from the GEBA archive from Europe the temporal stability of the SARAH-2.1 SIS CDR has been investigated. The decadal temporal stability between 1983 and 2016 has been determined to be $-0.8 \pm 0.4 \text{ W/m}^2/\text{dec.}$ see Figure 3-4 documenting the high stability of the SARAH-2.1 data record. Pfeifroth et al., 2018 provides further information on variability and trends of global radiation of SARAH-2 and surface measurements.

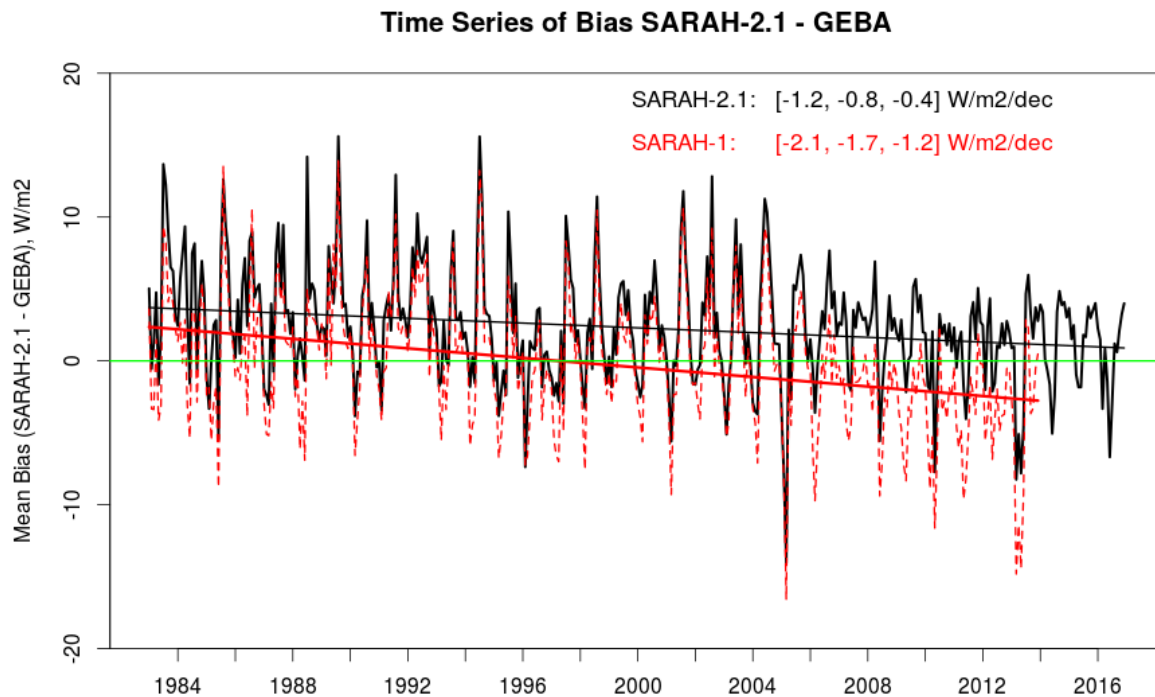


Figure 3-4: Comparison of SARAH-2.1 SIS CDR with GEBA ground measurements. Compared to GEBA there is no significant trend apparent, which indicates the temporal stability of the SIS CDR.

3.3.7 Limitations

Below is a list of known deficiencies and limitations of the SIS product:

- The high clear sky reflection over bright surfaces (e. g., desert regions) reduces the contrast between clear sky reflection and cloudy-sky reflection. This leads to higher uncertainties in CAL and errors in the calculation of SIS.
- The accuracy of aerosol information is not well defined in several regions of the world due to missing ground measurements. Any uncertainty in the aerosol information affects the accuracy of SIS, especially in regions that are dominated by cloud free sky. For the current Heliosat data record a climatology has been used. Monthly, daily and hourly variations in the aerosol optical depth are therefore not considered.

3.4 Surface Direct irradiance (SDI)

3.4.1 Product definition

The surface direct irradiance contains two direct radiation products, the direct normalized irradiance (DNI) and the surface incoming direct radiation (SID). The direct normal irradiance (DNI) is the radiation flux (irradiance) at the surface normal to the direction of the sun in the 0.2 - 4 μm wavelength region. It is expressed in W/m^2 . It is derived by normalisation of the direct irradiance, SID, with the cosine of the solar zenith angle (see Equation 3-6). SID is the radiation flux (irradiance) reaching a horizontal plane in the 0.2 – 4 μm wavelength region at the surface directly without scattering.

3.4.2 Algorithm outline

3.4.2.1 Clear sky

The algorithm for the calculation of SID under clear sky conditions is described in detail in Mueller et al., 2009 and also documented in the public license gnu-MAGIC project, <http://sourceforge.net/projects/gnu-magic>. It is a fast method to calculate solar irradiance (including the direct irradiance) for large areas, which uses an eigenvector hybrid LUT approach for the fast and accurate calculation of SID. The aerosol optical thickness and type is assigned to each pixel depending on the aerosol map derived from the aerosol information provided by the European Centre for Medium-Range Weather Forecasts (ECMWF). Monthly means of water vapour amounts are taken from the ERA-interim reanalysis provided by the ECMWF. The interpolation within the LUTs is done with a linear interpolation scheme. The atmospheric input and interpolation routine is identical for SIS and SID, with exception of a background surface albedo map, which is not needed for SID.

3.4.2.2 Cloudy sky situations

For the consideration of clouds on the clear sky irradiance a formula of Müller et al. (2009) is used, which describes the relation of the direct irradiance (all sky) SID_{allsky} to that of the clear sky direct irradiance SID_{clear} :

Equation 3-5

$$SID_{allsky} = SID_{clear} \cdot ((1 - CAL) + 0.38 \cdot CAL)^{2.5}$$

where CAL is the effective cloud albedo. This formula is an adaptation from the diffuse model of Skartveit et al., 1998. The direct irradiance is set to zero for CAL values above 0.6. DNI is subsequently derived from SID by normalisation with the solar zenith angle:

Equation 3-6

$$DNI = SID / \cos(SZA)$$

where SID is the direct irradiance and SZA is the solar zenith angle.

3.4.3 Details on processing, gridding and averaging

The calculation of the temporal averages of the SDI climate data records is conducted with the same method as for the surface irradiance (see Section 3.3.3)

3.4.4 Input data

The input is identical to that of SIS with exception of the background surface albedo map which is not needed for SDI. The input data is therefore described in Section 3.3.4. CAL, total water column, ozone content, aerosol information and look-up tables are used according to Section 3.3.4

3.4.5 Product example

Figure 3-5 provides examples of the SDI data records (DNI and SID)

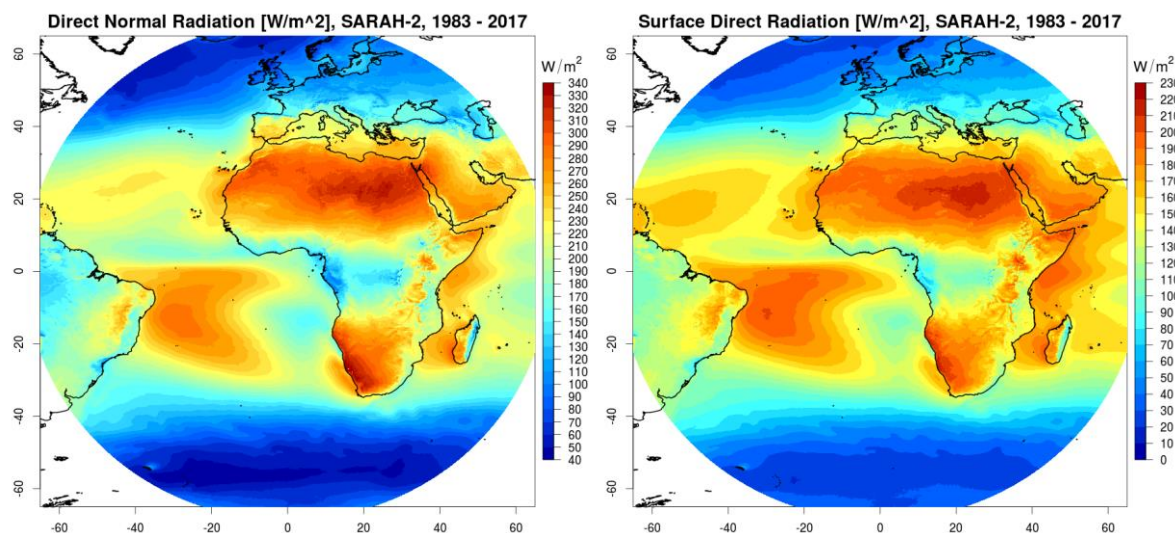


Figure 3-5: Illustration of the SDI (DNI and SID) climate data record; long term mean for 1983-2017.

3.4.6 Validation

The Product Requirement Document (PRD) [AD 1] lists specific product requirements which have to be fulfilled by the products. The achieved accuracy for the SDI data records are shown in Table 3-7. Please see section 3.3.6 for validation limitations.

Table 3-6: Accuracy achieved for SDI (SID and DNI).

Product	Summary on mean error (absolute)
SARAH-2.1 DNI: Direct Normal Radiaton	<i>Mean Absolute Bias of about 16 W/m² and 85 % of absolute bias values below 30 W/m² for monthly means;</i>
SARAH-2.1 SID: Surface Incoming Direct Radiaton	<i>Mean Absolute Bias of about 8 W/m² and 92 % of absolute bias values below 20 W/m² for monthly means;</i>

The detailed results of the validation are presented in the CM SAF Validation Report [RD 1: SAF/CM/DWD/VAL/METEOSAT_HEL].

Table 3-7: Summary of validation results for SARAH-2.1 SDI: N Number of comparisons. MAB: mean of absolute bias values for monthly/daily means. SD: standard deviation. AC: Correlation of anomalies. Frac_{mon} : Fraction of cases (months) with an accuracy outside of 30 W/m² (monthly means) and 40 W/m² (daily means). Basis of the results has been the comparison with 15 BSRN stations.

SID	N	Bias [W/m ²]	MAB [W/m ²]	SD [W/m ²]	AC	$\text{Frac}_{\text{mon}} > \text{target}$ accuracy [%]
SARAH-2.1						
Monthly Mean	2347	0.9	7.8	11.3	0.89	7.7
Daily mean	65.697	0.8	17.2	25.9	0.92	19.3
SARAH-1						
Monthly mean	1587	1.0	8.2	11.6	0.89	8.4
Daily mean	43.549	0.8	17.9	26.6	0.92	20.5
DNI						
SARAH-2.1						
Monthly mean	2263	-1.8	16.4	21.9	0.88	14.7
Daily mean	60.528	-0.8	33.4	46.8	0.91	32.3
SARAH-1						
Monthly mean	1541	3.3	17.5	22.9	0.87	16.4
Daily mean	41.253	3.8	34.0	48.4	0.91	32.8

3.4.7 Limitations

Below is a list of some of known deficiencies and limitations of the SDI product (see also SIS limitations)

- The relatively high clear sky reflection over bright surfaces reduces the contrast between clear sky reflection and cloudy sky reflection. This leads to higher uncertainties and errors in the calculation of CAL and subsequent of DNI.
- The accuracy of aerosol information is not known in several regions of the world due to missing ground measurements.
- SDI is quite sensitive to the AOD (aerosol optical depth) in clear sky situations, which introduces a certain amount of uncertainty as the accuracy of monthly AOD can only be expected to be +/- 0.1. Moreover, for the current Heliosat data record a climatology has been used. Monthly, daily and hourly variations in the aerosol optical depth are therefore not considered, which increases the uncertainty in daily and hourly values significantly. However, due to missing ground based measurements it is not evident nor proven that information about the temporal variation of aerosols gained from satellite would perform significantly better for the generation of a long term data records of monthly and daily means than a best-of aerosol climatology. Indeed, Kinne et al. (Kinne et al., 2006) discussed the limited accuracy of aerosol information retrieved from satellites. Moreover, dynamic aerosol information with appropriate coverage does not exist for the complete period of the Heliosat data record. Hence, uncertainties in SDI introduced by uncertainties in the AOD are mainly related to the lack of accurate and homogeneous input alternatives of aerosol information (especially over land) with high spatial and temporal resolution. However, due to the relative large sensitivity of SDI on aerosol optical depth the limited accuracy of the aerosol information is a significant reason for the lower accuracy of SDI relative to SIS.

3.5 Spectral Resolved Irradiance (SRI)

3.5.1 Product Definition

The spectral resolved irradiance (SRI) is defined as the radiation flux separated in 27 spectral bands based on the correlated-k method as developed by Kato et al., 1999. **Table 3-8** presents the 27 Kato bands that are provided in the data files.

Table 3-8: Spectral information provided in the SARA-2.1 SRI data record. The data are provided in W/m² for each spectral band.

CM SAF band	Kato-Band	Start [nm]	End [nm]
1	3	283.4	306.8
2	4	306.8	327.8
3	5	327.8	362.5
4	6	362.5	407.5
5	7	407.5	452.0
6	8	452.0	517.7
7	9	517.7	540.0
8	10	540.0	549.5
9	11	549.5	566.6
10	12	566.6	605.0
11	13	605.0	625.0
12	14	625.0	666.7
13	15	666.7	684.2
14	16	684.2	704.4
15	17	704.4	742.6
16	18	742.6	791.5
17	19	791.5	844.5
18	20	844.5	889.0
19	21	889.0	974.9
20	22	974.9	1045.7
21	23	1045.7	1194.2
22	24	1194.2	1515.9
23	25	1515.9	1613.5
24	26	1613.5	1964.8
25	27	1964.8	2153.5
26	28	2153.5	2275.2
27	29	2275.2	3001.9

3.5.2 Basic Retrieval Approach

The retrieval of the spectral resolved irradiance is based on the same retrieval approach as the SIS and SDI data records and follows the SPECMAGIC algorithm (Mueller et al., 2012). In contrast to the SIS and SDI retrieval algorithms, the full spectral information is contained in the SRI data record.

3.5.3 Details on processing, gridding and averaging

The calculation of the temporal averages of the SRI climate data record is conducted with the same method as for the surface irradiance (see section 3.3.3)

3.5.4 Input data

The input is identical to that of SIS and described in Section 3.3.4. CAL, total water column, ozone content, aerosol information and look-up tables are used according to Section 3.3.4.

3.5.5 Product example

Figure 3-6 shows, as an example, the normalized monthly mean spectral information (July 2014) for a tropical (humid) and a desert (dry) location. The spectral contributions to the integrated irradiance differ at these two locations mainly due to the different integrated water vapor contents. In particular in the tropical location the water vapor absorption at about 720 nm, 810 nm, 930 nm, 1130 nm, and 1370 nm reduce the contribution of these wavelengths to the integrated irradiance.

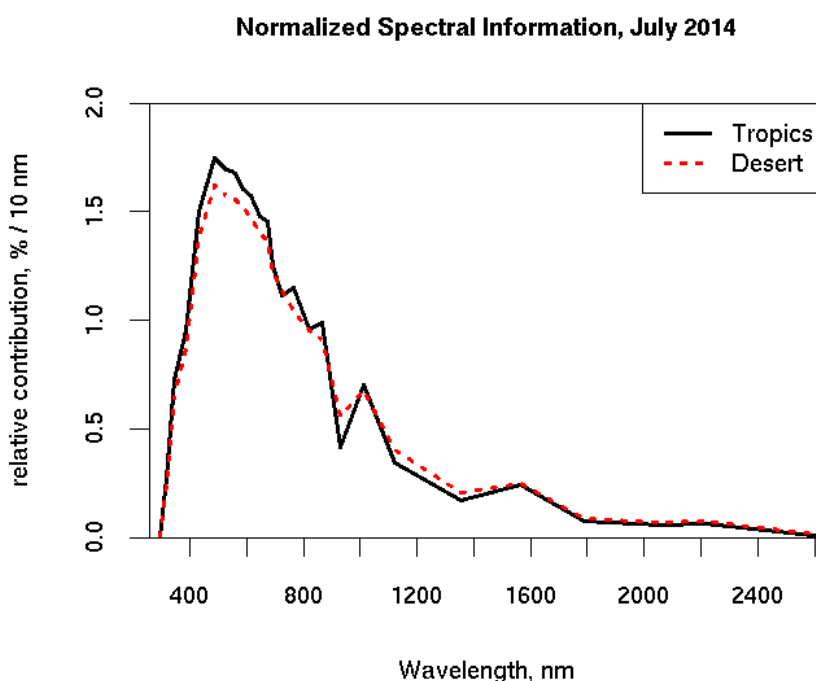



Figure 3-6: Normalized spectral information for July 2014 for a tropical (10°E, 10°N) and a desert (10°E, 25°N) location.

3.5.6 Validation

Only very limited surface reference measurements are available for the validation of the SRI climate data record. The only long term data record covering most of the solar spectral bands that allows the calculation of monthly averages has been obtained at the EU Joint Research Center in Ispra, Italy (Norton et al., 2015). Using some assumptions on the data availability to ensure a high data quality of the monthly means this data allows the calculation of 12

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

monthly mean values between March 2009 and April 2010 (May and November 2009 are missing). This data has been used for the validation of the SRI climate data record.

It was found that there is a tendency of the CM SAF SRI to overestimate the surface observations (consistent with the results obtained for SIS at Ispra). The average bias is below $0.03 \text{ W/m}^2/\text{nm}$ for wavelengths below 1000 nm, and decreases for longer wavelengths. Overall, the accuracy of the SRI data record fulfils the target requirements. For more information on the validation of the SRI data record the reader is referred to the validation report [RD 1].

3.5.7 Limitations

Below is a list of some known deficiencies and limitations of the SRI data record:

- For the validation of the SRI data record only surface reference measurements from one location are available, which limits the validation of this data record to one location and the limited time period.

The relatively high clear sky reflection over bright surfaces reduces the contrast between clear sky reflection and cloudy sky reflection. This leads to higher uncertainties and errors in the calculation of CAL and subsequent of SRI.

3.6 Sunshine Duration (SDU)

3.6.1 Product definition

The daily or monthly sunshine duration is the time per day or month at which DNI exceeds the WMO threshold of 120 W/m^2 .

3.6.2 Algorithm outline

3.6.2.1 Sunshine duration

Basis for the retrieval of satellite-based sunshine duration (SDU) are the SARAH-2 DNI data and the WMO threshold for bright sunshine, which is defined by $\text{DNI} \geq 120 \text{ W/m}^2$. SDU is derived by the ratio of sunny slots to all slots during daylight multiplied by the daylength.

The daylength is calculated depending on the date, longitude and latitude. The daylength is restricted by a threshold of the solar elevation angle (SEA) of 2.5° . The sunny slots are weighed depending on the number of surrounding cloudy and sunny grid points, which is discussed in more detail in section 3.6.2.2 and in RD 2. The number of daylight slots describes the maximum number of Meteosat observations (slots) per grid point and per day during daylight. Daylight is defined by the time where the SEA exceeds 2.5° .

3.6.2.2 Weighting of sunny slots

A sunny slot corresponds to a DNI value of 120 W/m^2 or larger. SARAH-2.1 provides instantaneous DNI data every 30 minutes. Therefore, without weighting, one sunny slot would correspond to a 30 minutes time window. In reality this is only the case in bright weather situations. If there are clouds in the surrounding area of a grid point, there is a probability that not the whole 30 minutes are sunny. This is also valid in the opposite case, when a cloudy grid point has sunny grid points in its near surrounding's. This fact should be

accounted for in the retrieval of SDU by using the information of the 24 surrounding grid points. In addition the information of two successive time steps is incorporated.

3.6.3 Details on processing, gridding and averaging

The output of the algorithm is described in section 3.6.2 for daily sums of SDU. To derive SDU monthly sums the daily sums of each month are summed up.

3.6.4 Input data

Basis for the retrieval of satellite-based sunshine duration (SDU) are the SARAH-2.1 DNI data.

3.6.5 Product example

Figure 3-7 provides an example of the SDU data records.

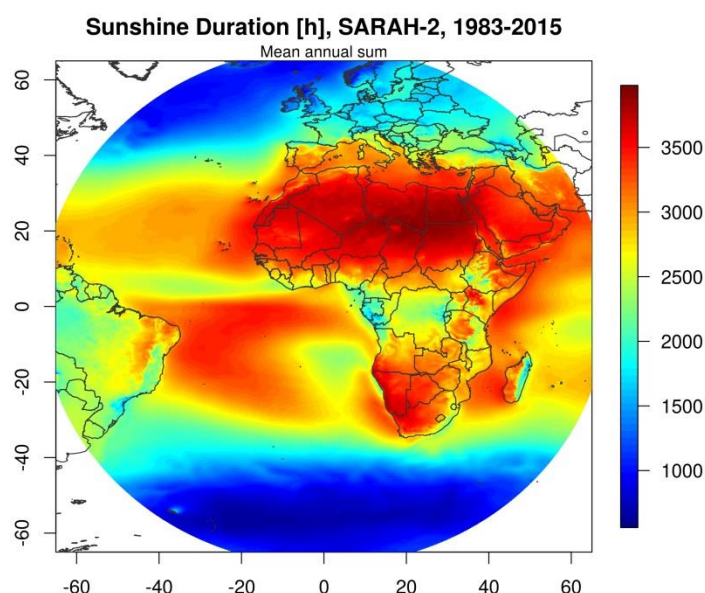


Figure 3-7: Illustration of the SDU climate data records; mean annual sum for 1983-2015.

3.6.6 Validation

The achieved accuracy for the SDU data record is shown in Table 3-9. Please see section 3.6.7 for validation limitations.

Table 3-9: Accuracy achieved for SDU.

Product	Summary on mean error (absolute)
SDU: Sunshine duration.	<i>Mean Absolute Difference of 17h and 86% of absolute difference values below 30h (+ uncertainty of ground based measurements) for monthly sums and 77% below 1.5h for daily sums, respectively).</i>

The detailed results of the validation are presented in the CM SAF Validation Report [RD 1: SAF/CM/DWD/VAL/METEOSAT_HEL].

Table 3-10: Summary of validation results for SDU: N Number of comparisons. MAD: mean of absolute bias values for monthly/daily sums. SD: standard deviation. AC: Correlation of anomalies. Frac_{mon} : Fraction of cases (months) with an accuracy outside of 30h (monthly sums) and 1.5h (daily sums). Basis of the results has been the comparison with CLIMAT and ECA&D stations.

SDU	N	Bias [h]	MAD [h]	SD [h]	AC	Frac > target accuracy [%]
SARA-2.1						
Monthly sum	137.811	8.45	16.6	21.3	0.88	13.7
Daily sum	2.642.777	0.37	1.01	1.45	0.93	22.8

3.6.7 Limitations

Below is a list of some of known deficiencies and limitations of the SDU product (see also SDI limitations)

In regions, such as the Sahara desert, DNI can exceed 120 W/m^2 even if the solar elevation angle is lower than 2.5° , which leads to unnatural artefacts in SDU. These artefacts occur mainly in regions with high solar insolation and very low cloud cover.

The retrieval algorithm for SDU includes two constants, which were derived empirically using comparisons with only German station measurements. The derivation procedure for these constants has to be extended for the next release to a wider range of trustworthy stations.

3.7 Planned improvements

- Improvement of atmospheric input

- Further evaluation of new aerosol climatology/information (e. g. higher temporal/spatial resolution) in order to improve the accuracy of the data record.
- Using daily means (instead of monthly means) of the integrated water vapour might help to improve the accuracy of the clear sky surface radiation and the subsequent products.

- Improvement of algorithms.

- Development and evaluation of methods for the correction of broken clouds effect for the direct beam irradiance.
- Evaluation of potential improvements in the retrieval of clear sky reflection to minimise cloud contamination.
- An improved detection of snow and its separation from clouds would substantially help to increase the accuracy of the effective cloud albedo and the surface radiation under snow-covered surface conditions.
- Detection of cloud shadows. With the classical HELIOSAT, cloud shadows receive a low cloud index value since they are dark, and thus the global radiation for these areas will be at maximum. This could potentially remove some of the remaining bias and spread.

4 Data description

This section describes the output formats for the surface radiation parameters. Each surface radiation parameter is gridded onto a regular lat/lon grid with a size of 0.05x0.05° (WSG 84). The time resolution includes 30-min instantaneous values, daily mean values, and monthly mean values for CAL, SIS, and SDI; SDU is available as daily and monthly sums; SRI is available as monthly mean only.

4.1 Product Names

Product types are:

- Surface incoming solar radiation (SIS), also known as global irradiance.
- Surface direct radiation (SDI).
- Spectrally Resolved irradiance (SRI)
- Sunshine Duration (SDU)
- Effective cloud albedo (CAL), also known as cloud index.

Time resolution:

- Daily mean value. (for SDU: daily sum)
- Monthly mean value (for SDU: monthly sum)
- 30 min instantaneous values.

4.2 Data Format and Ordering

CM SAF's climate monitoring products of surface radiation are provided as NetCDF (Network Common Data Format, <http://www.unidata.ucar.edu/software/netcdf/>) files. The NetCDF software functions as an I/O library, callable from C, FORTRAN, C++, Perl, or other language for which a NetCDF library is available. The library stores and retrieves data in self-describing, machine-independent data records. Each NetCDF data record can contain multidimensional, named variables (with differing types that include integers, reals, characters, bytes, etc.), and each variable may be accompanied by ancillary data, such as units of measure or descriptive text.

A NetCDF consists of dimensions, variables, and attributes. These components can be used together to capture the meaning of data and relations among data. The dimensions of the CM SAF radiation CDRs are longitude, latitude and time (see Table A-1). Each NetCDF file contains one variable (SIS, DNI, SID, SRI, SDU, or CAL) at the given time resolution (instantaneous, daily or monthly means (sums for SDU)) together with the data values for the dimensions (see Table A-2). The variables as well as the dimension variables are accompanied by attributes following the NetCDF Climate and Forecast (CF) Metadata Convention 1.4 (<http://cfconventions.org/>). The attributes that are included in the CM SAF surface radiation data records are listed in

Table A-5.

All data records are provided in separated files, one file for each time step, with the exception of the 30-min instantaneous data, which are provided with all time steps per day in a single file. The data records cover monthly, daily and 30-min instantaneous values.

Below a list of relevant product acronyms (\$product) and acronyms for the averaging period (\$mean):

SIS: Surface Incoming Shortwave Radiation. Also called solar surface irradiance

DNI: Direct Normal Irradiance at surface

SID: Surface incoming direct radiation

SRI: Spectrally resolved Irradiance

SDU: Sunshine Duration

CAL: Effective cloud albedo

As additional data layer the corresponding daily and monthly mean clear-sky surface radiation data are available.

mm: Monthly mean
dm: Daily mean
in: instantaneous
ms: Monthly sum
ds: Daily sum

Within the CAL daily mean NetCDF files an additional layer called "CAL_nobs" is included that gives the number of the available observations in the visible spectral range per pixel, at the given day.

Ordered files will follow the following naming convention

\$Product\$mean\$Year\$Month\$Day\$Hour\$Version

Further details on the naming are given in the Web User Interface and the naming convention document available at the CM SAF web page: www.cmsaf.eu -> Products -> "Naming convention" item.

4.3 Data ordering via the Web User Interface (WUI)

Information on the CM SAF services are provided through the CM SAF homepage www.cmsaf.eu. The web page includes information and documentation on the CM SAF and the CM SAF products, information on how to contact the user help desk. It provides also the link to the WUI (<http://wui.cmsaf.eu>), which allows to search the product catalogue and to order products.

On the WUI "webpage" (<http://wui.cmsaf.eu>), a detailed description how to use the web interface for product search and ordering is given. The user is referred to this description since it is the central and most up to date documentation. However, some of the key features and services are briefly described in the following sections.

Copyright note:

All intellectual property rights of the CM SAF products belong to EUMETSAT. The use of these products is granted to every interested user, free of charge. If you wish to use these products, EUMETSAT's copyright credit must be shown by displaying the words "copyright (year) EUMETSAT" on each of the products used.

4.3.1 Product ordering process

You need to be registered and logged in to order products. A login is provided upon registration, all products are delivered free of charge. After the selection of the product, the desired way of data transfer can be chosen. This is either via a temporary ftp account (the default setting), or by CD/DVD or email. Each order will be confirmed via email, and the user will get another email once the data have been prepared. If the ftp data transfer was selected, this second email will provide the information on how to access the ftp server.

4.4 Data volume:

The data amount depends on the data request of the user, in detail on the size of the selected region and the duration of the covered time period. The user will be informed about the data volume of his request within the WUI ordering process.

Below the maximum values for one parameter covering the complete Meteosat disk and time period are given:

Monthly Means:	~2 GB
Daily Means:	~80 GB
30-min Instantaneous:	~3 TB

4.5 Contact User Help Desk staff

In case of questions the contact information of the User Help Desk (e-mail address contact.cmsaf@dwd.de, telephone and fax number) are available via the CM SAF main webpage (www.cmsaf.eu) or the main page of the Web User Interface.

4.6 Feedback/User Problem Report

Users of CM SAF products and services are encouraged to provide feedback on the CM SAF product and services to the CM SAF team. Users can either contact the User Help Desk (see chapter 4.4) or use the “User Problem Report” page. A link to the “User Problem Report” is available either from the CM SAF main page (www.cmsaf.eu) or the Web User Interface main page.

4.7 Service Messages / log of changes

Service messages and a log of changes are also accessible from the CM SAF main webpage (www.cmsaf.eu) and provide useful information on product status, versioning and known deficiencies.

5 Tools and Auxiliary data

This section describes currently available tools to read, display, re-project and modify the CM SAF products. All tools and auxiliary data shortly described here, are accessible from the CM SAF main webpage (www.cmsaf.eu).

All tools and auxiliary data described are free of charge. They come with no warranty and are based on best effort basis. When encountering problems, please contact the User help desk (Section 4.4).

5.1 Climate data operators (CDO)

To allow easy access to CM SAF data records the possibility to import CM SAF data has recently been integrated into the 'climate data operators' (CDO) which is a well-established conversion tool in the climate modelling community (<https://code.zmaw.de/projects/cdo>).

This package was originally developed for processing and analysis of data produced by a variety of climate and numerical weather prediction models (e. g. for file operations, simple statistics, arithmetic, interpolation or the calculation of climate indices). Besides the conversion between different file formats, cdo offers possibilities for pre-processing the data for validation studies, especially interpolation to other grid types and selection of regions, including methods for interpolation of non-continuous data records such as e. g. cloud types.

The CM SAF Meteosat climate data records are provided on a regular latitude longitude grid, whereby the latitude and longitude are given and described in the netCDF-files. CDO employs this information for spatial operations on these final products. A link to this tools is available on the CM SAF web site (www.cmsaf.eu/tools/). CDO has been used for the averaging of CAL, for the generation of SARAH-2.1 monthly means, and for modifications of the NetCDF metadata settings.

Please refer to the CDO-manual for detailed instructions how to import and process CM SAF products.

5.2 CM SAF R Toolbox

The CM SAF R Toolbox is a set of R-based tools for the preparation, analysis and visualization of CM SAF NetCDF data. It was developed in the framework of a EUMETSAT/CM SAF workshop in 2015 with the intention to have an easy-to-use tool, which helps unexperienced R-user to start working with CM SAF NetCDF formatted data.

The tools are mainly based on prepared R-scripts, which guide the user through all options. By this, the tools can be used without any scripting knowledge and the user gets a first impression of the usage of R. CM SAF data are provided via ftp as tar-files, which can contain multiple time steps in separate NetCDF files. The CM SAF R Toolbox contains an R-script for the preparation of ordered CM SAF data, which includes to untar, unzip and merge the data and the option to sub-select the data in time and space. The output of this first step is a single ready-to-use NetCDF file including all time steps. For the analysis and manipulation of NetCDF data the Toolbox offers an R-script, which acts as an interface to the 'cmsaf' R-package.

The 'cmsaf' R-package is a collection of more than 50 operators, which are developed to handle CM SAF data. This R-package is the core of the functionality of the CM SAF R Toolbox. The 'cmsaf' R-package can be used without the Toolbox and it is freely available via all CRAN mirrors of the R-project. So far, the 'cmsaf' R-package was downloaded more than 10.000 times worldwide.

For visualization of CM SAF NetCDF data the Toolbox offers an R-based graphical interface for interactive plots and a set of specialized prepared R-scripts for the plotting of spatial data or 1D-timeseries.

5.3 Auxiliary Data


This section gives an overview of available auxiliary data records which will be helpful for further processing and interpretation of CM SAF products. All auxiliary data records are accessible via the webpage www.cmsaf.eu in the folder 'Data Access'. Table 5-1 lists the available auxiliary data records and their respective coverage. Further a NetCDF-file with information on the true time of observation for the 30-min instantaneous data is available on the cmsaf-webpage (cmsaf.eu -> Products -> Auxiliary Data).

Table 5-1: Table of available auxiliary data records. AOD=Aerosol Optical Depth, ssa=single scattering albedo, gg=asymmetry parameter, the aerosol data is available as ASCII files from the CM SAF web page in the menu >add on products<.

Region	Surface albedo	Aerosols	Water vapour
	[-]	[AOD,ssa,gg]	[mm]
CM SAF full disc area ("MA") (METEOSAT)	X	X	x
Global ("GL").		x	x

6 References

- Cano, D., Monget, J. M., Albuissou, M., Guillard, H., Regas, N., and Wald, L., 1986: A method for the determination of the global solar-radiation from meteorological satellite data, *Solar Energy*, **37**, 31-39.
- Benedetti, A., Morcrette, J.-J., Boucher, O., Dethof, A., Engelen, R.J., Fisher, M., Flentje, H., Huneeus, N., Jones, L., Kaiser, J.W., Kinne, S., Mangold, A., Razinger, M., Simmons, A.J., Suttie, M., 2009: Aerosol analysis and forecast in the European Centre for Medium-Range Weather Forecasts Integrated Forecast System: 2. Data assimilation, *Journal of Geophysical Research*, **114**, D13205.
- Betts Alan K., Martin Köhler and Yuanchong Zhang, 2009: Comparison of river basin hydrometeorology in ERA-Interim and ERA-40 reanalyses with observations, *Journal of Geophysical Research*, **114**, D02101, doi:10.1029/2008JD010761.
- Dee, D. P., et al., 2011, The ERA-Interim reanalysis: configuration and performance of the data assimilation system, *Quarterly Journal of the Royal Meteorological Society*, **137**(656), 553-597, doi:10.1002/qj.828.
- Diekmann, F.-J. et al., 1988: An operational estimate of global solar irradiance at ground level from METEOSAT data: results from 1985 to 1987, *Meteorol. Rdsch.*, **41**, 65-79.
- Dürr, B. , Zelenka A., Müller R.W., and R. Philipona, 2010, Validation of MeteoSwiss and CM-SAF satellite based global solar irradiance over the Alps, *International Journal of Remote Sensing*, **21**, 5549-5571.
- EUM TD 04: "Meteosat Data Collection and Retransmission System", Technical Description, Revision 5, 1998
- EUM TD 05: „The Meteosat System“, Revision 4, November 2000
- EUM TD 06: "The Meteosat Archive - User Handbook", November 2001
- Hammer A., Heinemann D., Hoyer C., Kuhlemann R., Lorenz E., Müller R., and Beyer H. G., 2003: Solar energy assessment using remote sensing technologies, *Remote Sens. Environ.*, **86**, 423-432.
- Hess, M., P. Koepke, and I. Schult, 1998: Optical Properties of Aerosols and Clouds: The Software Package OPAC. *Bull. Amer. Meteor. Soc.*, **79**, 831-844.
- Kato, S., T. P. Ackerman, J. H. Mather, and E. E. Clothiaux, 1999: The k-distribution method and correlated-k approximation for a shortwave radiative transfer model, *Journal of Quantitative Spectroscopy and Radiative Transfer*, **62**(1), 109-121, doi:http://dx.doi.org/10.1016/S0022-4073(98)00075-2.
- Kinne, S., Schulz M., Textor C. et al., 2006: An AeroCom initial assessment – optical properties in aerosol component modules of global models, *Atmos. Chem. Phys.*, **6**, 1815-1834.
- Kinne, S., D. O'Donnel, P. Stier, S. Kloster, K. Zhang, H. Schmidt, S. Rast, M. Giorgetta, T. F. Eck, and B. Stevens (2013), MAC-v1: A new global aerosol climatology for climate studies, *J. Adv. Model. Earth Syst.*, **5**, 704–740, doi:10.1002/jame.20035.
- Mayer, B. and Kylling, A., 2005: Technical note: The libRadtran software package for radiative transfer calculations - description and examples of use. *Atmos. Chem. Phys.*, **5**, 1855-1877.
- Möser, W., 1983: Globalstrahlung aus Satellitenmessungen. *Mitteilungen aus dem Institut für Geophysik und Meteorologie der Universität zu Köln*, Köln.

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

Mueller R.W. et al, 2004: Rethinking satellite based solar irradiance modelling – The SOLIS clear sky module, *Remote Sens. Environ.*, **91**, 160-174.

Mueller, R. W., C. Matsoukas, A. Gratzki, H.D. Behr and R. Hollmann, 2009: The CM SAF operational scheme for the satellite based retrieval of solar surface irradiance – A LUT based eigenvector approach, *Remote Sens. Environ.*, **113**, 1012-1024.

Mueller, R.; Behrendt, T.; Hammer and A.; Kemper, A., 2012: A New Algorithm for the Satellite-Based Retrieval of Solar Surface Irradiance in Spectral Bands. *Remote Sens.*, **4**, 622-647.

Mueller, R. and Träger-Chatterjee, C., 2014: Brief accuracy assessment of aerosol climatologies for the retrieval of solar surface radiation, *Atmosphere*, **5**, 959-972.

Mueller, R., U. Pfeifroth and C. Träger-Chatterjee, 2015a: Towards Optimal Aerosol Information for the Retrieval of Solar Surface Radiation using Heliosat. *Atmosphere* **6**(7), 863-878.

Mueller, R., U. Pfeifroth, J. Trentmann, and R. Cremer, 2015b: Digging the METEOSAT treasure - 3 Decades of Solar Surface Radiation. *Remote Sensing* **7**(6), 8067-8101.

Morcrette, J. J., Boucher, O., Jones, L., Salmond, D., Bechtold, P., Beljaars, A., Benedetti, A., Bonet, A., Kaiser, J. W., Razinger, M., Schulz, M., Serrar, S., Simmons, A. J., Sofiev, M., Suttie, M., Tompkins, A. M. and Untch, A., 2009: Aerosol analysis and forecast in the European Centre for Medium-Range Weather Forecasts Integrated Forecast System: Forward modelling, *J. Geophys. Res.*, **114**, D06206.

Norton, M., A. M. G. Amillo, and R. Galleano, 2015: Comparison of solar spectral irradiance measurements using the average photon energy parameter, *Solar Energy*, **120**, 337-344, doi:10.1016/j.solener.2015.06.023.

Pfeifroth, U., Sanchez-Lorenzo, A., Manara, V., Trentmann, J. and R. Hollmann, 2018: Trends and Variability of Surface Solar Radiation in Europe Based On Surface- and Satellite-Based Data Records, *Journal of Geophysical Research - Atmospheres*, **123** (3), 1735-1754. doi: 10.1002/2017JD027418.

Posselt, R., R. Mueller, J. Trentmann, R. Stockli and M.A. Liniger, 2014: A surface radiation climatology across two Meteosat satellite generations, *Remote Sensing of Environment*, **142**, 103-110.

Schulz, J., Albert, P., Behr, H.-D., Caprion, D., Deneke, H., Dewitte, S., Dürr, B., Fuchs, P., Gratzki, A., Hechler, P., Hollmann, R., Johnston, S., Karlsson, K.-G., Manninen, T., Müller, R., Reuter, M., Riihelä, A., Roebeling, R., Selbach, N., Tetzlaff, A., Thomas, W., Werscheck, M., Wolters, E., and Zelenka, A., 2009: Operational climate monitoring from space: the EUMETSAT Satellite Application Facility on Climate Monitoring (CM-SAF), *Atmos. Chem. Phys.*, **9**, 1687-1709, <https://doi.org/10.5194/acp-9-1687-2009>.

Skartveit A., Olseth J., Tuft M., 1998: An hourly diffuse fraction model with correction for variability and surface albedo. *Solar Energy*, **63**, 173–183.

7 Appendix

7.1 Appendix A: Description of the netCDF file format

The netCDF metafile definitions follows the cf 1.4 convention, please see <http://cfconventions.org/> for details

Table A-1: Dimensions in the SIS, SID, DNI, CAL netCDF files

Dimension	Size	Description
Lon	2601	Longitude
Lat	2601	Latitude
Time	1	Time

Table A-2: Variables in the netCDF SIS, SID, DNI, CAL, SDU files

Variable	Type	Dimension	Description
Lat	float	(lat)	Longitude [°E]
Lon	float	(lon)	Latitude [°N]
Time	float	(time)	Time [hours since 01.01.1983]
SIS, SID, DNI or CAL	short	(lon,lat,time)	Radiation variable or Effective Cloud Albedo
SDU	float	(lon,lat,time)	Sunshine duration

Table A-3 Dimensions in the SRI netcdf files

Dimension	Size	Description
Lon	2402	Longitude
Lat	2402	Latitude
kato	29	Scattering Wavelength
Time	1	Time

Table A-4: Variables in the netcdf SRI files

Variable	Type	Dimension	Description
Lat	float	(lat)	Longitude [°E]; WSG 84
Lon	float	(lon)	Latitude [°N]; WSG 84
Kato	Int	(kato)	Scattering Wavelength
Time	float	(time)	Time [days since 01.01.1983]
SRI	short	(lon,lat,kato,time)	Spectral resolved irradiance per band [W/m ²]

Table A-5: Variable attributes in the netCDF files

Attribute name	Type	Description
units	string	the units of the variable
long_name	string	a more descriptive variable name
standard_name	string	a pre-defined variable name according to the standard name table in order to enable users of data from different sources to determine whether quantities were in fact comparable
coordinates	string	identifies the coordinate variables
_FillValue	same as variable	This value is considered to be a special value that indicates undefined or missing data; it is used to pre-fill disk space allocated to the variable.
missing_value	same as variable	deprecated, included for backward compatibility, describes the same as the [_FillValue]
comments	string	Miscellaneous information about the data or methods used to produce it.

7.2 Appendix B: SARB/CERES albedo

<http://www-surf.larc.nasa.gov/surf/pages/bbalb.html>

The albedo is calculated in a two step process. The first step is to determine scene type for a given 10 minute region. The SARB group uses the 17 scene types as specified by the International Geosphere/Biosphere Programme, plus "Tundra", "Sea Ice" and "Fresh Snow" scenes. Each has an associated spectral albedo curve between 0.2 and 4.0 micro meters. These spectral curves are integrated to give a broad band albedo for the region

7.3 Appendix C: Complete equations for the effective cloud albedo - solar irradiance relation



The effective cloud albedo is related to the solar irradiance via the clear sky index. The clear sky index is defined as:

$$k = S/S_{CLS}$$


Here S/S_{CLS} is the solar irradiance for cloud free skies. The relation between the effective cloud albedo CAL and the clear sky index is mainly given by:

$$k = 1 - CAL$$

This relation is defined by physics, in detail by the law of energy conservation (Dagested, 2005). However, above a CAL value of 0.8 empirical corrections are needed in order to consider:

-  The effect of statistical noise, which could lead to CAL values above 1 and below 0 (occurs very seldom, however has to be considered).
-  The effect of saturation occurring in optically thick clouds.

In these regions the n-CAL relation was determined from the statistical regression using the ground-based measurements at European sites and fitted to get the best performance at all the ground sites. The equations given below provide the complete n-CAL relation for all possible CAL values. It is important to note that the empirical fit has been performed in the 80s and used since then without refitting.

	Product user Manual Meteosat Climate Data Records of Surface Radiation SARAH-2	Doc. No: SAF/CM/DWD/PUM/METEOSAT/HEL Issue: 2.4 Date: 22.01.2019
---	---	---

$$\begin{aligned}
&CAL < -0.2 : k = 1.2, \\
&-0.2 \leq CAL \leq 0.8 : k = 1 - CAL, \\
&0.8 < CAL \leq 1.1 : k = 2.0667 - 3.6667 \cdot CAL + 1.6667 \cdot CAL^2, \\
&CAL > 1.1 : k = 0.05
\end{aligned}$$

As a consequence of the definition of the clear sky index, the surface solar irradiance for the full-sky situation (G) is given by,

$$SIS = k \cdot SIS_{CLS},$$

where SIS_{CLS} is the clear sky surface solar irradiance calculated using the MAGIC code (Mueller et al., 2004, 2009, 2012).

8 Glossary – List of Acronyms in alphabetical order

AVHRR	Advanced Very High Resolution Radiometer
AOD	Aerosol Optical Depth
BSRN	Baseline Surface Radiation Network
CAL	Effective Cloud Albedo
CDOP	Continuous Development and Operational Phase
CDO	Climate Data Operators
CDR	Climate Data Record
CLIMAT	Measurements from Surface Climate Stations
CM SAF	Satellite Application Facility on Climate Monitoring
DWD	Deutscher Wetterdienst
DNI	Direct Normal Irradiance
ECMWF	European Centre for Medium-Range Weather Forecast
ECV	Essential Climate Variable
ERA	ECMWF Reanalysis
FRAC	Fraction of days larger than the target value.
GADS/OPAC	Global Aerosol Data Set / Optical Properties of Aerosols and Clouds
GCOS	Global Climate Observing System
GEBA	Global Energy Balance Data Archive
GERB	Geostationary Earth Radiation Experiment
GEWEX	Global Energy and Water Cycle Experiment
K	Clear sky index
LUT	RTM based Look-Up-Table
PRD	Product Requirement Document
PUM	Product User Manual
MAD	Mean of absolute deviation over several days or months
MVIRI	Meteosat Visible-InfraRed Imager
MACC	Monitoring Atmospheric Composition and Climate

NOAA	National Oceanic and Atmospheric Administration
RTM	Radiative Transfer Model
SARAH	Surface Solar Radiation Data records – Heliosat
SD	Standard deviation
SDI	Surface Direct Irradiance (consist of SID and DNI)
SDU	Sunshine Duration
SEA	Sun Elevation Angle
SEVIRI	Spinning Enhanced Visible and InfraRed Imager
SID	Surface Incoming Direct radiation, commonly called direct irradiance
SIS	Surface Incoming Solar radiation, commonly called global irradiance or surface solar irradiance
SRI	Spectral Resolved Irradiance
SSA	Single Scattering Albedo
SZA	Solar Zenith Angle